


HP VHM - Bohr-Reibahle mit Innenkühlung 5xD Solid carbide drill reamer with internal coolant hole

711...

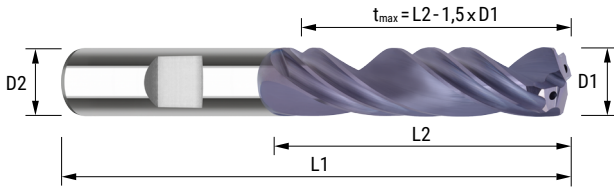

Werkzeugdaten / Tool data				Werkzeugempfehlung / Tool Recommendation		Einsatz / Capabilities					
TYP N	2	140°	K	HA	HB	Norm	TIALN	Stahl steel	GG(G)	z	5xD
D1	D2	L2	L1	Artikel-Nr. / Article-No.	HA	HB					
H7	h6										
3,98	6,00	36	74	711.038...	.00	.10					
3,99	6,00	36	74	711.039...	.00	.10					
4,00	6,00	36	74	711.040...	.00	.10					
4,01	6,00	36	74	711.041...	.00	.10					
4,02	6,00	36	74	711.042...	.00	.10					
4,98	6,00	44	82	711.048...	.00	.10					
4,99	6,00	44	82	711.049...	.00	.10					
5,00	6,00	44	82	711.050...	.00	.10					
5,01	6,00	44	82	711.501...	.00	.10					
5,02	6,00	44	82	711.502...	.00	.10					
5,98	6,00	44	81	711.051...	.00	.10					
5,99	6,00	44	81	711.052...	.00	.10					
6,00	6,00	44	81	711.060...	.00	.10					
6,01	6,00	44	81	711.061...	.00	.10					
6,02	6,00	44	81	711.062...	.00	.10					
7,98	8,00	53	91	711.070...	.00	.10					
7,99	8,00	53	91	711.071...	.00	.10					
8,00	8,00	53	91	711.080...	.00	.10					
8,01	8,00	53	91	711.081...	.00	.10					
8,02	8,00	53	91	711.082...	.00	.10					
9,98	10,00	61	103	711.090...	.00	.10					
9,99	10,00	61	103	711.091...	.00	.10					
10,00	10,00	61	103	711.092...	.00	.10					
10,01	10,00	61	103	711.100...	.00	.10					
10,02	10,00	61	103	711.101...	.00	.10					
11,98	12,00	72	118	711.110...	.00	.10					
11,99	12,00	72	118	711.111...	.00	.10					
12,00	12,00	72	118	711.120...	.00	.10					
12,01	12,00	72	118	711.121...	.00	.10					
12,02	12,00	72	118	711.122...	.00	.10					
14,00	14,00	77	124	711.140...	.00	.10					
16,00	16,00	83	133	711.160...	.00	.10					
18,00	18,00	93	143	711.180...	.00	.10					
20,00	20,00	101	153	711.200...	.00	.10					